



Micro-Distribution Cable

FCA-XXX-X-LXX-X-EX / 2-12 Fibers

Description

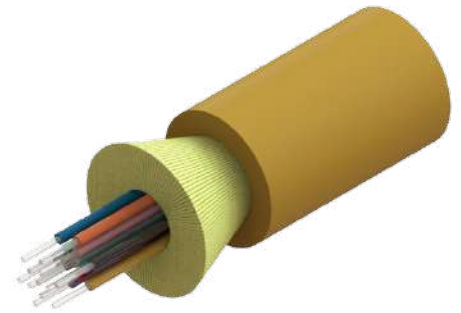
Waveoptics Micro-Distribution Cables are designed for indoor applications, high density installation and data centers. Small outer diameter design is ideal for small spaces.

The optical fibers are under a protective cover made of acrylate. Aramid yarn is used as a strength member.

The following jacket materials are available:

PVC RISER: used in vertical installations. Prevents the spread of flames to higher floors, in case of fire. Riser cable jackets are rated for flame generation and are held to a lower standard compared to plenum cables.

PVC PLENUM: ideal for applications in spaces with good air circulation, such as low ceilings or under elevated floors. Resistant to fire and produces low smoke when burned. Cable jackets used in plenum spaces are rated for both flame and smoke generation.



MICRO-DISTRIBUTION CABLE 3.0MM OFNR
12F G652D S EX

Quality

Waveoptics is a ISO-9001: 2015 certified company.

We meet or exceed the following international standards:

- Telcordia GR-409: Generic requirements for indoor fiber optic cable.
- IEC 60794: Basic requirements for optical fiber and cable elements.

Each Waveoptics cable meets the highest quality standards in the industry and contains a compliance certificate in which the performed tests in our quality laboratory are physically attached.

Applications:



Indoor



Bend
Insensitive

Protections:



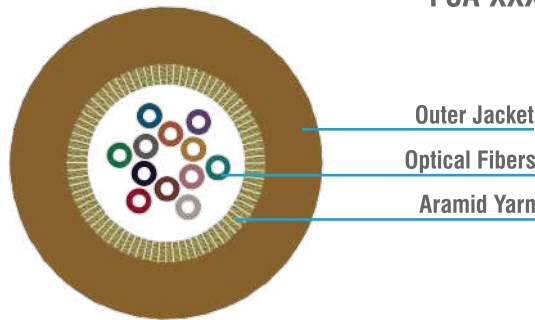
Flame
Retardant



Riser Cable



Plenum Cable

Dimensions and Properties


Design	
Fiber count	2 - 12
Fiber color code	
Dielectric strength member	Aramid yarn
Outer jacket material*	PVC Riser / PVC Plenum
Reel length	2 km & 4 km (6,562 ft & 13,123 ft) (±5%)
Temperature range	
Operation	0°C to 70°C (32°F to 158°F)
Installation	0°C to 60°C (32°F to 140°F)
Storage / transport (Riser / Plenum)	-40°C to 70°C (-40°F to 158°F)
Mechanical properties	
Maximum crush resistance	350 N/100mm
Minimum bend radius (operation / installation)	25 mm (1 in) / 50 mm (2 in)

Note: Waveoptics recommends storing cable in a proper temperature environment prior to installation to allow the cable temperature to meet installation temperature range specifications for best installation results.

*LSZH jacket also available upon request.

Outer jacket / tight buffer material	Nominal outer diameter (mm) (in) (±5%)	Jacket thickness (mm) (in)	Tensile strength (N) (lbf) long-term / short-term	Cable weight (kg/km) (lb/kft) (±10%)
PVC Riser	2 (0.08)	0.25 (0.01)	12 / 40 (2.7 / 9)	3.4 (2.3)
PVC Plenum				3.7 (2.5)
PVC Riser	2.95 (0.12)	0.55 (0.022)	30 / 100 (6.7 / 22.5)	7.8 (5.3)
PVC Plenum				8.8 (5.9)

Outer Jacket Color Guide
SINGLE MODE FIBER


SM G652.x fiber
SM G657.x fiber
Yellow

MULTI MODE FIBER


MM OM1 fiber
MM OM2 fiber
Orange



MM OM3 fiber
MM OM4 fiber
Aqua

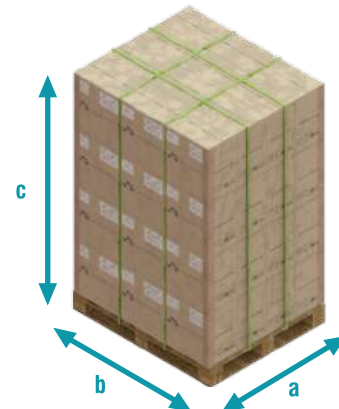
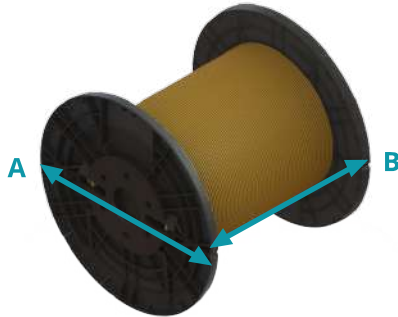


MM OM5 fiber
Lime Green

Printed Information on Outer Jacket

=/MONTH//YEAR/ WAVEOPTICS= =MICRO-DISTRIBUTION= =/FIRE RATING/= =/FIBER TYPE/= =/FIBER COUNT/= =/METERS*/ M= =/LOT #/=

- Printed in black, except for dark colored cables, which will be printed in white.
- Marking interval: every 1 meter + 1% or 2 feet + 1%.
- The marking can be changed according to customer requirements.
- *The standard marking interval is every 1 meter, in case the marking requirement is in feet, a notification on the purchase order would be necessary.

Reel Dimensions and Pallet Packaging Information


Outer jacket / tight buffer material	Nominal outer diameter (mm) (in) ($\pm 5\%$)	Reel length (m) (ft) ($\pm 5\%$)	A (mm) (in) ($\pm 5\%$)	B (mm) (in) ($\pm 5\%$)	Reel weight (kg) (lb) ($\pm 10\%$)	Pallet capacity (m) (ft) ($\pm 5\%$)	a (mm) (in) ($\pm 5\%$)	b (mm) (in) ($\pm 5\%$)	c (mm) (in) ($\pm 5\%$)
PVC Riser	2 (0.08)	2,000 (6,562)	365 (14)	204 (8)	8.4 (18.4)	96,000 (314,961)	1,100 (43)	1,200 (47)	1,704 (67)
PVC Plenum					9 (19.8)				
PVC Riser	2 (0.08)	4,000 (13,123)	457 (18)	340 (13)	17.2 (38)	72,000 (236,220)	1,100 (43)	1,200 (47)	1,556 (61)
PVC Plenum					18.5 (40.7)				
PVC Riser	2.95 (0.12)	2,000 (6,562)	457 (18)	340 (13)	19.1 (42.2)	36,000 (118,110)	1,100 (43)	1,200 (47)	1,556 (61)
PVC Plenum					21 (46.4)				

Note 1: please contact your sales agent for different reel lengths available.

*Note 2: all documentation included in the packaging is in english, if a different language is needed, please contact your sales agent.

Packaging includes*:

- 1.- Reel handling instructions.
- 2.- Test report certificate.

3.- Product description (weight, dimensions, lot and part number).

Transmission Performance by Fiber Type

Fiber type	Single Mode				Multi Mode				
Waveoptics fiber type	G652.D	G657.A1	G657.A2	G657.B3	OM1	OM2	OM3	OM4	OM5
Waveoptics fiber code	F	T	E	N	B	L	M	P	V
OFS® fiber type	G652.D	AllWave® FLEX	AllWave® FLEX+	EZ-Bend®	62.5 um Laser Optimized	50 um Graded Index	LaserWave® FLEX 300	LaserWave® FLEX 550	LaserWave® WideBand
OFS® fiber code	1	2	3	6	5	8	9	0	4
Wavelength (nm)	1310/1550				850/1300				
Max. attn. (dB/km) (1)	0.4/0.3	0.4/0.3	0.4/0.3	0.4/0.3	3.4/1	3/1			
Min. bandwidth (MHz*km) (2)	-				200/500	750/500	1500/500	3500/500	3500/500
1-Gigabit ethernet distance (m) (3)	-				300	750	> 550	> 550	> 550
10-Gigabit ethernet distance (m) (4)	-				-	150	300	400	400
40/100-Gigabit ethernet distance (m) (5)	-				-	-	100/70	150/100	150/100
Cable marking specifications	G652.D	G657.A1	G657.A2	G657.B3	OM1	OM2	OM3	OM4	OM5

Notes:
 (1) Maximum attenuation after cabling process.
 (2) OFL (overfilled launch) bandwidth measurement.
 (3) 1-Gb/s at 850 nm transmissions based on IEEE 802.3z test protocol.
 (4) 10-Gb/s at 850 nm transmissions based on IEEE 802.3ae test protocol.
 (5) 40/100-Gb/s at 850 nm transmissions based on IEEE P802.3ba test protocol.
 *For more information about the optical fibers, consult the corresponding data sheets.

Part Number Configuration
FCA-XXX-X-LXX-X-EX

Fiber count	Waveoptics optical fiber type	OFS® optical fiber type	Outer diameter	Outer jacket material
002 - 2 fibers	F - SM G652.D	1 - SM G652.D	20 - 2.0 mm	R - PVC Riser
004 - 4 fibers	T - SM G657.A1	2 - AllWave® FLEX	30 - 2.95 mm	P - PVC Plenum
006 - 6 fibers	E - SM G657.A2	3 - AllWave® FLEX+		
008 - 8 fibers	N - SM G657.B3	6 - EZ-Bend®		
012 - 12 fibers	B - MM OM1	5 - 62.5 um Laser Optimized		
	L - MM OM2 TRUE BEND	8 - 50 um Graded Index		
	M - MM OM3 TRUE BEND	9 - LaserWave® FLEX 300		
	P - MM OM4 TRUE BEND	0 - LaserWave® FLEX 550		
	V - MM OM5 TRUE BEND	4 - LaserWave® WideBand		

Optical cable compliance

EX - Waveoptics standard

AC - Buy American Act compliance

Note: please contact your Waveoptics distributor if you need any additional compliance or if you have questions about the part number configuration.