



Toneable Flat Drop Cable Dry

FOSPC-0XX-X-TFDLTD30-FTXXX-US/1-24 Fibers

Applications



Outdoor



Aerial



Duct Installation




Direct-buried



Self-supporting



Toneable

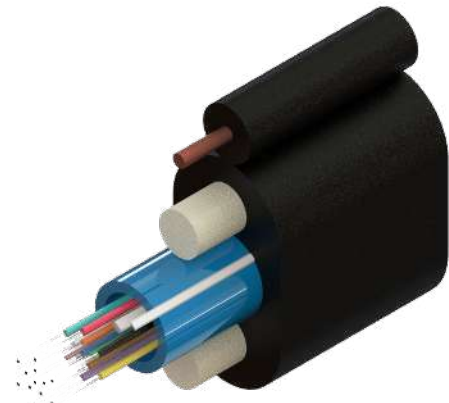

TONEABLE FLAT DROP CABLE DRY 12F
G652.D FIBER FT

Protections



UV Resistant



Water Blocking



Crush Resistant

Description

Waveoptics® Toneable Flat Drop Cable Dry is designed for self-supporting, direct-buried and duct installations. Ideal for drop applications, offering ease of access as well as easy installation

Single loose tube which provides great mechanical properties under a wide range of conditions such as crush test and impact test. Dry water blocking technology allows a cleaner and quicker installation as well as a cost-friendly cable preparation.

PE single jacket with additives makes a resistant, durable and easy to strip cable, providing superior protection against UV radiation, fungus, abrasion and other environmental factors.

Two parallel dielectric strength members that offer exceptional crush resistance. The FRP strength members are coated with EAA for improved adherence.

Copper toning conductor allows effortless detection in direct-buried installation.

Quality

Waveoptics® is a ISO-9001:2015 certified company.

We meet or exceed the following international standards:

- Telcordia GR-20: Generic requirements for optical fiber and optical fiber cable.
- IEC 60794: Basic requirements for optical fiber and cable elements.
- ANSI/ICEA S-110-717: Standard for optical fiber outside plant communications cable.


Each Waveoptics® cable meets the highest quality standards in the industry and contains a compliance certificate in which the performed tests in our quality laboratory are physically attached.


TECHNICAL DATA SHEET

OUTDOOR CABLE

FOSPC-0XX-X-TFDLTD30-FTXXX-US/1-24 Fibers

Dimensions & Properties

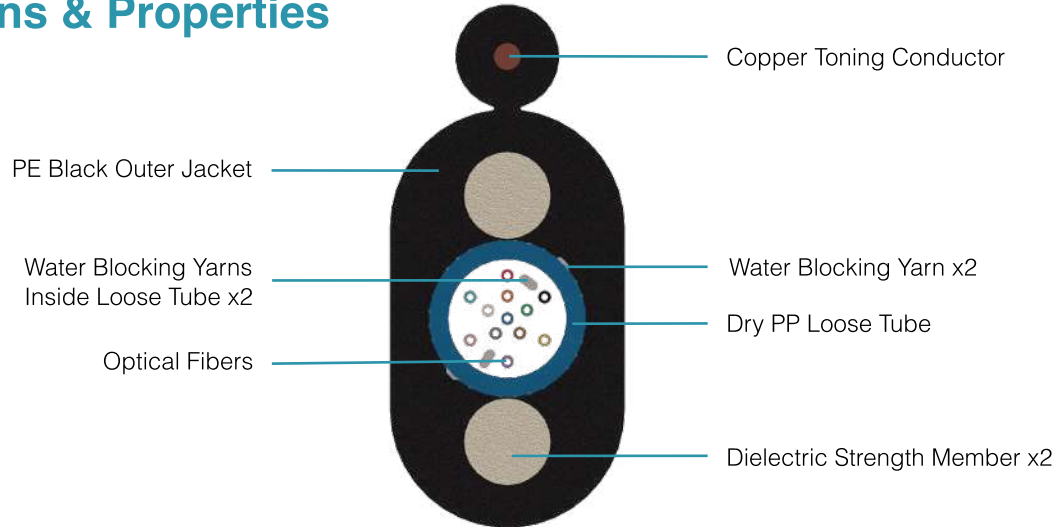

Design	
Fiber count	1-24
Fiber Color Code	
Loose Tube Diameter ($\pm 5\%$)	3.0 mm (0.12 in)
Dielectric Strength Member Diameter / Material	1.65 mm / EAA Coated FRP
Outer Jacket Material	Polyethylene
Toning Conductor	24 AWG copper wire
Drum Length	2,000 ft, 5,000 ft, 10,000 ft, 15,000 ft & 20,000 ft ($\pm 5\%$)
Temperature Range	
Operation	-40°C to 70°C (-40° F to 158° F)
Installation	-30°C to 70°C (-22° F to 158° F)
Storage / Transport	-40°C to 70°C (-40° F to 158° F)
Mechanical Properties	
Crush Resistance (Short-term / Long-term)	2,200 N/100 mm / 1,100 N/100 mm
Minimum Bend Radius (operation/installation)	10 x OD / 20 x OD

Note: Waveoptics® recommends storing cable in a proper temperature environment prior to installation to allow the cable temperature to meet installation temperature range specifications for best installation results.

Note: * 24 fiber reels only contains one water blocking yarn

Folio PE-443-01-EN

Last Review 12/9/2024

TECHNICAL DATA SHEET OUTDOOR CABLE

FOSPC-0XX-X-TFDLTD30-FTXXX-US/1-24 Fibers

Dimensions & Properties


Fiber Count	Cable Weight (kg/km) (lb/kft) (±10%)	Tensile Strength (N) (lbf) Long-term/Short-term	Nominal Outer Diameter (mm) (in)	Dielectric Strength Member (mm) (in)
1-12	48 (32)	400 / 1,350 (90 / 303)	10.0 (±0.65) x 4.5 (±0.5) (0.38 x 0.18)	1.65 (0.065)
24	44 (29)	400 / 1,350 (90 / 303)	10.0 (±0.4) x 4.5 (±0.3) (0.39 x 0.17)	1.65 (0.06)

Printed Information on Outer Jacket

= /XXXX/FT= = /MONTH/ /YEAR/ /BRAND/ OPTICAL CABLE=  = /LOT# / = = FLAT DROP== TONEABLE = = DRY= = /FIBER COUNT/= = /FIBER TYPE/=

- Printed in white and resistant to physical tests on marking
- Marking interval: every 2 feet + 1%
- The marking can be changed according to customer requirements

Drum Dimensions and Pallet Packaging Information

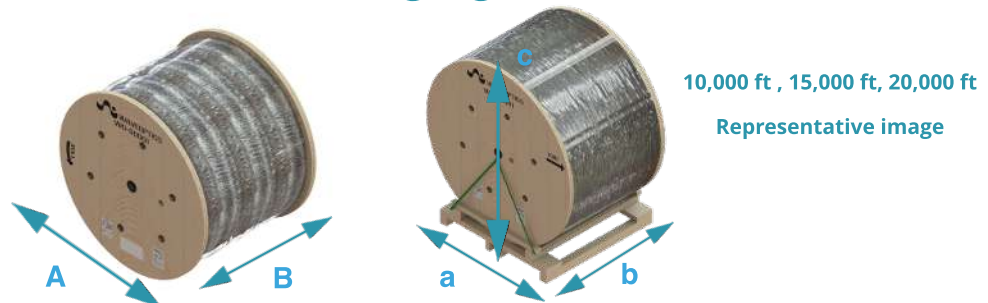

Drum Length (ft) (m) (±5%)	Fiber Count	A (mm) (in) (± 5%)	B (mm) (in) (± 5%)	Drum and Pallet Total Weight (kg) (lb) (± 10%)	Total Packaging(± 5%)		
					a (mm) (in)	b (mm) (in)	c (mm) (in)
10,000 (3,048)	1-12	900 (35)	930 (37)	198 (437)	965 (38)	1,067 (42)	1,021 (40)
15,000 (4,572)	1-12	1,000 (39)	780 (31)	250 (551)	965 (38)	914 (36)	1,121 (44)
20,000 (6,096)	1-12	1,000 (39)	650(26)	333 (734)	965 (38)	914 (36)	1,121 (44)

Note 1: Please contact your sales agent for higher fiber counts or different drum lengths available.

Note 2: All documentation included in each drum of cable is in English, if a different language is needed, please contact your sales agent.

Note 3: Drums should be stored indoors avoiding environmental exposures such as: sunlight, humidity, precipitation or dust. Therefore, FONCS does not guarantee the drum performance once exposed to any type of environmental exposure.

All drums include:*

1. Drum handling instructions
2. Test report certificate
3. Product description (weight, dimensions, lot and part number)
4. End cable marking
5. Both ends include end caps to protect against humidity

Folio PE-443-01-EN

Last Review 12/9/2024

www.waveoptics.net


info@waveoptics.net

TECHNICAL DATA SHEET

OUTDOOR CABLE

FOSPC-0XX-X-TFDLTD30-FTXXX-US/1-24 Fibers

Drum Dimensions and Pallet Packaging Information

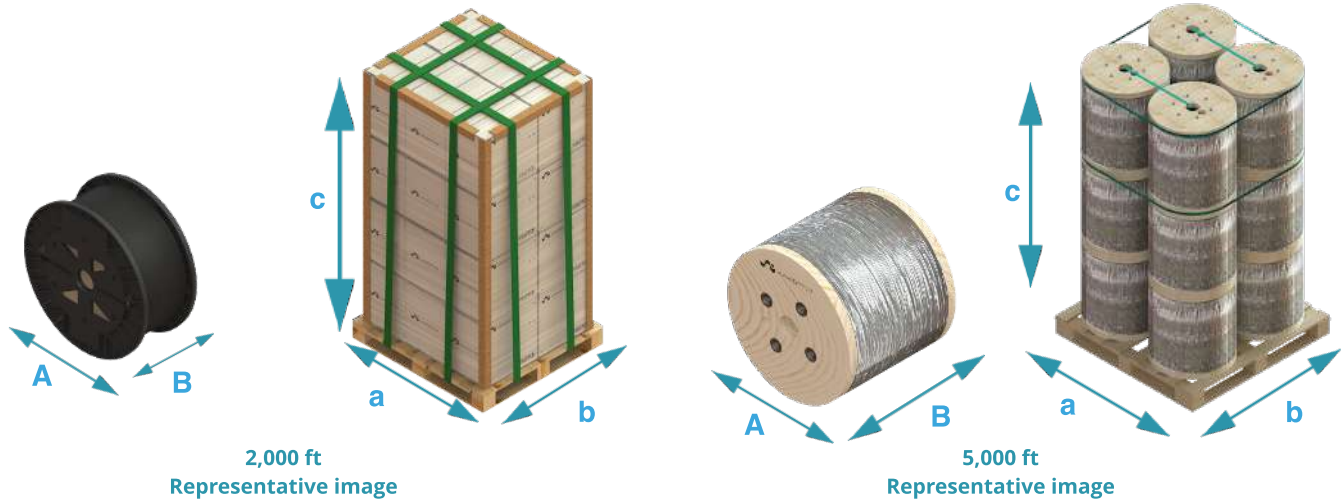

Drum length (ft)(m) (±5%)	Fiber count	A (mm)(in) (±5%)	B (mm)(in) (±5%)	Drum and Pallet Total Weight (kg) (lb) (±10%)	Pallet capacity (ft)(m) (+5%)	Total packaging (+5%)		
						a (mm)(in)	b (mm)(in)	c (mm)(in)
2,000 (610)	1 - 12	475 (18)	340 (13)	658 (1,451)	48,000 (14,630)	1,100 (43)	1,200 (47)	1,560 (61)
5,000 (1,524)	1 - 12	550 (21)	626 (25)	1,095 (2,414)	60,000 (18,288)	1,140 (45)	1,140 (45)	1,988 (78)

Note 1: Please contact your sales agent for higher fiber counts or different drum lengths available.

Note 2: All documentation included in each drum of cable is in English, if a different language is needed, please contact your sales agent.

Note 3: Drums should be stored indoors avoiding environmental exposures such as: sunlight, humidity, precipitation or dust. Therefore, FONCS does not guarantee the drum performance once exposed to any type of environmental exposure.

All drums include:*

1. Drum handling instructions
2. Test report certificate
3. Product description (weight, dimensions, lot and part number)
4. End cable marking
5. Both ends include end caps to protect against humidity

Folio PE-443-01-EN

Last Review 12/9/2024

www.waveoptics.net


info@waveoptics.net

TECHNICAL DATA SHEET

OUTDOOR CABLE

FOSPC-0XX-X-TFDLTD30-FTXXX-US/1-24 Fibers

Drum Dimensions and Pallet Packaging Information

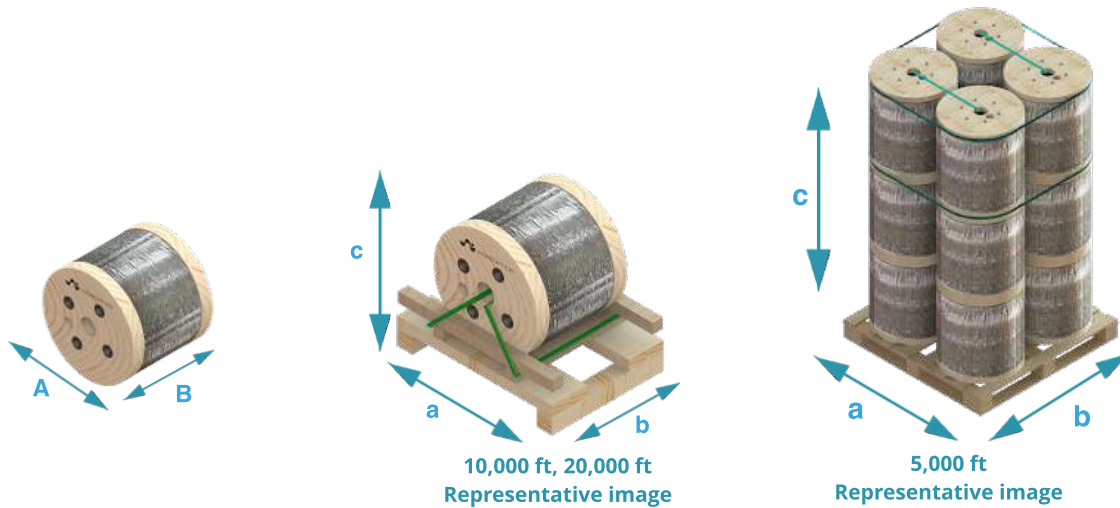

Drum Length (ft)(m) (± 5%)	Fiber Count	A (mm)(in) (± 5%)	B (mm)(in) (± 5%)	Drum and Pallet Total weight (kg)(lb) (±10%)	Pallet capacity (ft)(m) (+5%)	Total Packaging (±5%)		
						a (mm)(in)	b (mm)(in)	c (mm)(in)
5,000 (1,524)	24	630 (25)	580 (23)	86 (190)	5,000 (1,524)	1120 (44)	1120 (44)	1890(74)
10,000 (3,048)	24	780 (37)	620 (30)	171 (377)	10,000 (3,048)	800 (31)	760 (30)	960 (38)
20,000 (6,096)	24	930 (37)	750 (30)	311 (686)	20,000 (6,096)	960 (38)	910 (36)	1120 (44)

Note 1: Please contact your sales agent for higher fiber counts or different drum lengths available.

Note 2: All documentation included in each drum of cable is in English, if a different language is needed, please contact your sales agent.

Note 3: Drums should be stored indoors avoiding environmental exposures such as: sunlight, humidity, precipitation or dust. Therefore, FONCS does not guarantee the drum performance once exposed to any type of environmental exposure.

All drums include:*

1. Drum handling instructions
2. Test report certificate
3. Product description (weight, dimensions, lot and part number)
4. End cable marking
5. Both ends include end caps to protect against humidity

TECHNICAL DATA SHEET OUTDOOR CABLE

FOSPC-0XX-X-TFDLTD30-FTXXX-US/1-24 Fibers

Transmission Performance by Fiber Type

Fiber Type	Single Mode			
Waveoptics® Fiber Type	G652.D	G657.A1	G657.A2	G657.B3
Waveoptics® Fiber Code	F	T	E	N
OFS® Fiber Type	G652.D	-	-	-
OFS® Fiber Code	1	-	-	-
Wavelength (nm)	1310/1550			
Max.attn. (dB/km) (1)	0.36/0.25	0.36/0.25	0.4/0.3	
Cable Marking Specifications	G652.D	G657.A1	G657.A2	G657.B3
Notes: (1) Maximum attenuation after cabling process.				

Part Number Configuration

FOSPC-0XX-X-TFDLTD30-FTXXX-US

Fiber Count

01 - 1 Fiber
02 - 2 Fibers
04 - 4 Fibers
06 - 6 Fibers
08 - 8 Fibers
12 - 12 Fibers

Waveoptics® Fiber Type

F - SM G652.D
T - SM G657.A1
E - SM G657.A2
N - SM G657.B3

OFS® Fiber Type

1 - SM G652.D

Drum Length / Quantity

000 - PE
0BX - PE 2,000 FT
0D1 - 5,000 FT

Optical Cable Compliance

US - Waveoptics® Standard

FOSPC-024-X-TFDLTD30-FTXXX-US

Fiber Count

24 - 24 Fibers

Waveoptics® Fiber Type

T - SM G657.A1
E - SM G657.A2
N - SM G657.B3

Drum Length

0BK - 5,000 ft
0BG - 10,000 ft
0BT - 20,000 ft

Optical Cable Compliance

US - Waveoptics® Standard

Note: please contact your Waveoptics® distributor if you need any additional compliance or if you have questions about the part number configuration.

Folio PE-443-01-EN

Last Review 12/9/2024

www.waveoptics.net

info@waveoptics.net