

## PRODUCT INSTALLATION

### GENERAL

This document will serve as guide for installation method of the products "DROP FIBER OPTIC PUSHABLE JUMPER" all the kit connector must be included in the pushable jumper assemblies.

### FIRST STEP - BOOT

Slide the boot over the body of the connector until it snaps into place [Fig.1].



**Fig. 1** Boot goes first

### SECOND STEP - BODY (CRITICAL STEP)

**Important** to identify the guide of the body [Fig.2] and the guide of the part of the cable where the body is going to be fix [Fig.3].

Once guides are identified, align the body guide with the cable guide (use the arrow of the body as a reference) [Fig.4]. It is **crucial** to follow this instruction according to the [Fig.4], otherwise the pushable jumper may be not functional.

Place the body according both guides and slide the boot in to the body [Fig.5].



**Fig. 2** Guide of the body



**Fig. 3** Guide of the cable




**Fig. 4** Align the body with the cable



**Fig. 5** Place the body according both guides and slide the boot in to the body

**THIRD STEP - HOUSING (CRITICAL STEP)**

Align the guide of the housing with the arrow of the body [Fig.6] then slide the housing over the body until it snaps into place [Fig.7]

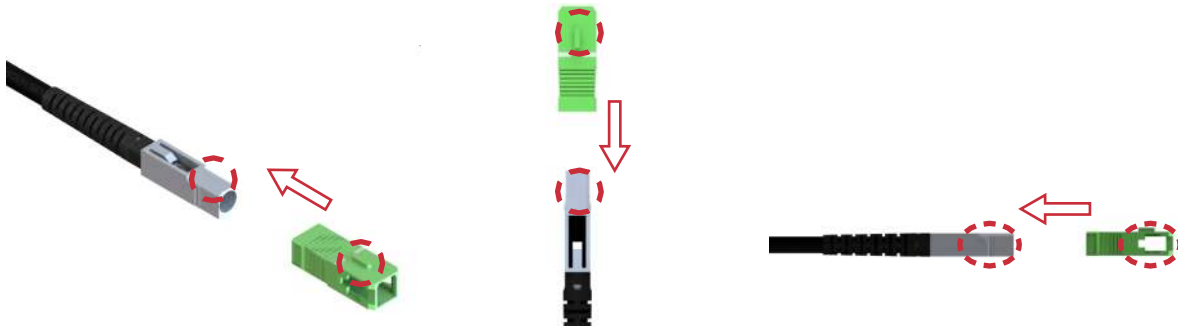

**Fig. 6** Guide housing and body



**Fig. 7** Place the housing

**FOURTH STEP - HOUSING**

Finally place the dust cap [Fig 8]



**Fig. 8**